

Position	Qty.	Description
	1	<p><b>JPC 4-47 A-C-BBVP</b></p>  <p style="text-align: center;"><b>Note! Product picture may differ from actual product</b></p> <p>Product No.: <a href="#">99074060</a></p> <p>JPC, is a self-priming, single-stage centrifugal pump with axial suction port and radial discharge port, G 1. The pump has a built-in ejector with guide vanes for optimum self-priming properties. JPC, is ideal for water supply and transfer in minor applications such as domestic systems, garden irrigation and car washing. It may be used in the following domestic installations:</p> <ul style="list-style-type: none"> <li>• single- or two-family households</li> <li>• summer houses and weekend cottages.</li> </ul> <p>JPC, is especially ideal for use in small-scale agriculture, gardening and wherever self-priming operation is necessary.</p> <p><b>Liquid:</b>  Pumped liquid: Water  Liquid temperature range: 0 .. 60 °C  Liquid temp: 20 °C  Density: 998.2 kg/m<sup>3</sup></p> <p><b>Technical:</b>  Primary shaft seal: BBVP  Approvals on nameplate: CE  Curve tolerance: ISO9906:2012 3B</p> <p><b>Materials:</b>  Pump housing: COMPOSITE  Impeller: COMPOSITE</p> <p><b>Installation:</b>  Range of ambient temperature: -10 .. 55 °C  Maximum operating pressure: 6 bar  Pump inlet: G1  Pump outlet: G1</p> <p><b>Electrical data:</b>  Nominal power - P2: 0.8 HP  Power input - P1: 1.18 HP  Mains frequency: 60 Hz  Rated voltage: 1 x 220-230 V  Rated current: 3.9 A  Capacitor size - run: 12.5 µF/450 V  Enclosure class (IEC 34-5): IP44  Insulation class (IEC 85): F</p>



Company name:

Created by:



Phone:

Date:

15/12/2016

Position	Qty.	Description
		Type of cable plug: NONE
		<b>Others:</b>
		Net weight: 8 kg
		Gross weight: 9 kg
		Shipping volume: 0.026 m <sup>3</sup>

## 99074060 JPC 4-47 60 Hz

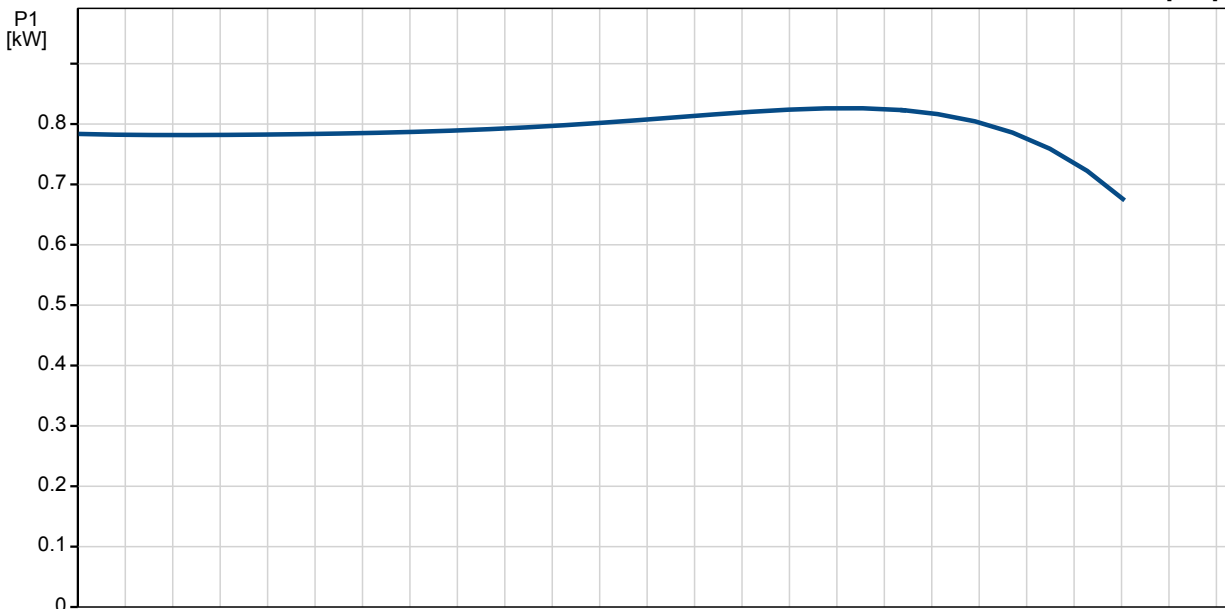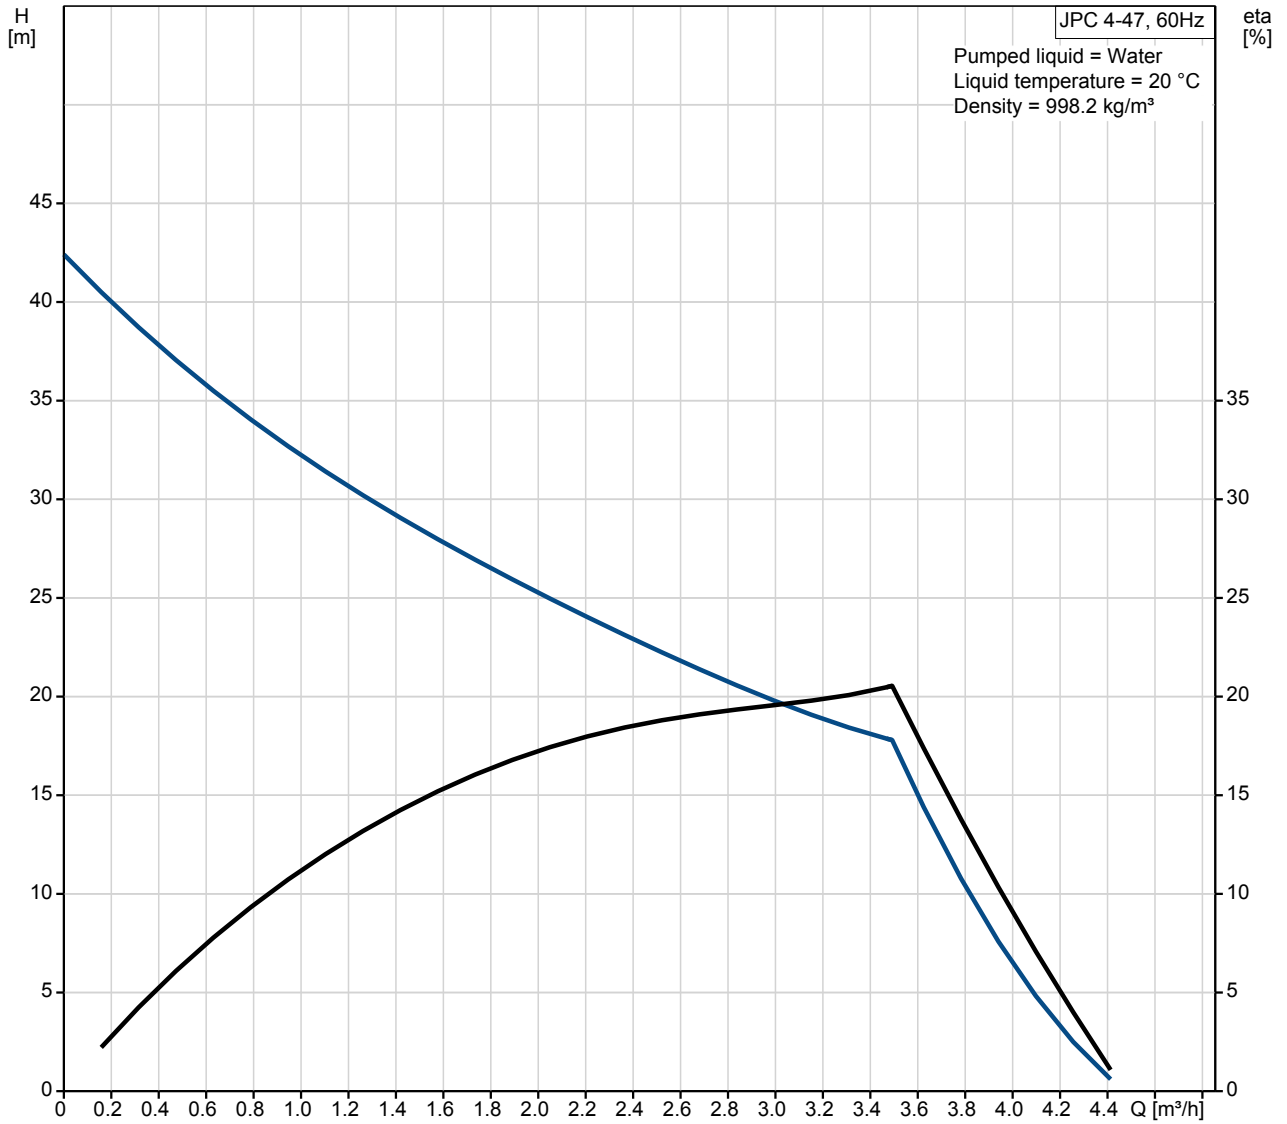

Description	Value
-------------	-------

**General information:**

Product name:	JPC 4-47 A-C-BBVP
Product No:	99074060
EAN number:	5712600400849
Price:	On request

**Technical:**

Head max:	47 m
Primary shaft seal:	BBVP
Approvals on nameplate:	CE
Curve tolerance:	ISO9906:2012 3B
Pump version:	A
Model:	A
Ejector valve:	no

**Materials:**

Pump housing:	COMPOSITE
Impeller:	COMPOSITE
Material code:	C

**Installation:**

Range of ambient temperature:	-10 .. 55 °C
Maximum operating pressure:	6 bar
Pump inlet:	G1
Pump outlet:	G1

**Liquid:**

Pumped liquid:	Water
Liquid temperature range:	0 .. 60 °C
Liquid temp:	20 °C
Density:	998.2 kg/m³

**Electrical data:**

Nominal power - P2:	0.8 HP
Power input:	1.18 HP
Mains frequency:	60 Hz
Rated voltage:	1 x 220-230 V
Rated current:	3.9 A
Capacitor size - run:	12.5 µF/450 V
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Type of cable plug:	NONE
Cable:	Y

**Controls:**

Presscontrol:	without press control
Switch:	on/off switch not included

**Others:**

Net weight:	8 kg
Gross weight:	9 kg
Shipping volume:	0.026 m³

