

Position	Qty.	Description																																										
	1	<p>JPC 4-54 A-C-BBVP</p>  <p style="text-align: center;">Note! Product picture may differ from actual product</p> <p>Product No.: 99074061</p> <p>JPC, is a self-priming, single-stage centrifugal pump with axial suction port and radial discharge port, G 1. The pump has a built-in ejector with guide vanes for optimum self-priming properties. JPC, is ideal for water supply and transfer in minor applications such as domestic systems, garden irrigation and car washing. It may be used in the following domestic installations:</p> <ul style="list-style-type: none"> • single- or two-family households • summer houses and weekend cottages. <p>JPC, is especially ideal for use in small-scale agriculture, gardening and wherever self-priming operation is necessary.</p> <p>Liquid:</p> <table> <tr> <td>Pumped liquid:</td> <td>Water</td> </tr> <tr> <td>Liquid temperature range:</td> <td>0 .. 60 °C</td> </tr> <tr> <td>Liquid temp:</td> <td>20 °C</td> </tr> <tr> <td>Density:</td> <td>998.2 kg/m³</td> </tr> </table> <p>Technical:</p> <table> <tr> <td>Primary shaft seal:</td> <td>BBVP</td> </tr> <tr> <td>Approvals on nameplate:</td> <td>CE</td> </tr> <tr> <td>Curve tolerance:</td> <td>ISO9906:2012 3B</td> </tr> </table> <p>Materials:</p> <table> <tr> <td>Pump housing:</td> <td>COMPOSITE</td> </tr> <tr> <td>Impeller:</td> <td>COMPOSITE</td> </tr> </table> <p>Installation:</p> <table> <tr> <td>Range of ambient temperature:</td> <td>-10 .. 55 °C</td> </tr> <tr> <td>Maximum operating pressure:</td> <td>6 bar</td> </tr> <tr> <td>Pump inlet:</td> <td>G1</td> </tr> <tr> <td>Pump outlet:</td> <td>G1</td> </tr> </table> <p>Electrical data:</p> <table> <tr> <td>Nominal power - P2:</td> <td>1 HP</td> </tr> <tr> <td>Power input - P1:</td> <td>1.47 HP</td> </tr> <tr> <td>Mains frequency:</td> <td>60 Hz</td> </tr> <tr> <td>Rated voltage:</td> <td>1 x 220-230 V</td> </tr> <tr> <td>Rated current:</td> <td>5 A</td> </tr> <tr> <td>Capacitor size - run:</td> <td>12.5 µF/450 V</td> </tr> <tr> <td>Enclosure class (IEC 34-5):</td> <td>IP44</td> </tr> <tr> <td>Insulation class (IEC 85):</td> <td>F</td> </tr> </table>	Pumped liquid:	Water	Liquid temperature range:	0 .. 60 °C	Liquid temp:	20 °C	Density:	998.2 kg/m ³	Primary shaft seal:	BBVP	Approvals on nameplate:	CE	Curve tolerance:	ISO9906:2012 3B	Pump housing:	COMPOSITE	Impeller:	COMPOSITE	Range of ambient temperature:	-10 .. 55 °C	Maximum operating pressure:	6 bar	Pump inlet:	G1	Pump outlet:	G1	Nominal power - P2:	1 HP	Power input - P1:	1.47 HP	Mains frequency:	60 Hz	Rated voltage:	1 x 220-230 V	Rated current:	5 A	Capacitor size - run:	12.5 µF/450 V	Enclosure class (IEC 34-5):	IP44	Insulation class (IEC 85):	F
Pumped liquid:	Water																																											
Liquid temperature range:	0 .. 60 °C																																											
Liquid temp:	20 °C																																											
Density:	998.2 kg/m ³																																											
Primary shaft seal:	BBVP																																											
Approvals on nameplate:	CE																																											
Curve tolerance:	ISO9906:2012 3B																																											
Pump housing:	COMPOSITE																																											
Impeller:	COMPOSITE																																											
Range of ambient temperature:	-10 .. 55 °C																																											
Maximum operating pressure:	6 bar																																											
Pump inlet:	G1																																											
Pump outlet:	G1																																											
Nominal power - P2:	1 HP																																											
Power input - P1:	1.47 HP																																											
Mains frequency:	60 Hz																																											
Rated voltage:	1 x 220-230 V																																											
Rated current:	5 A																																											
Capacitor size - run:	12.5 µF/450 V																																											
Enclosure class (IEC 34-5):	IP44																																											
Insulation class (IEC 85):	F																																											



Company name:

Created by:



Phone:

Date:

04/12/2016

Position	Qty.	Description
		Type of cable plug: NONE
		Others:
		Net weight: 11 kg
		Gross weight: 11 kg
		Shipping volume: 0.026 m ³

99074061 JPC 4-54 60 Hz

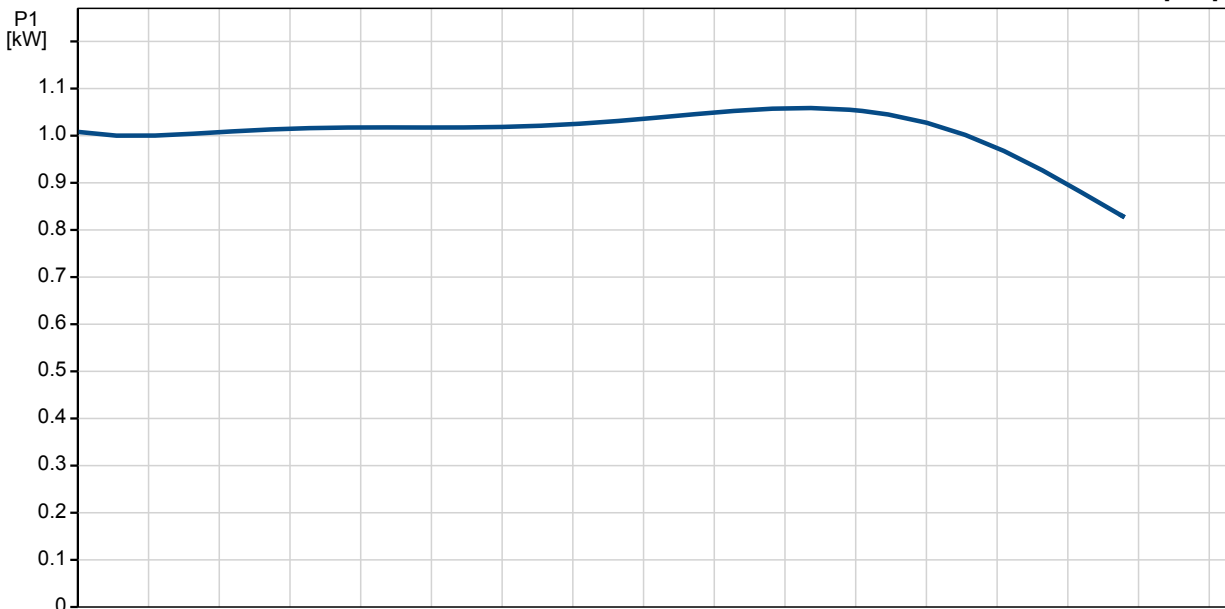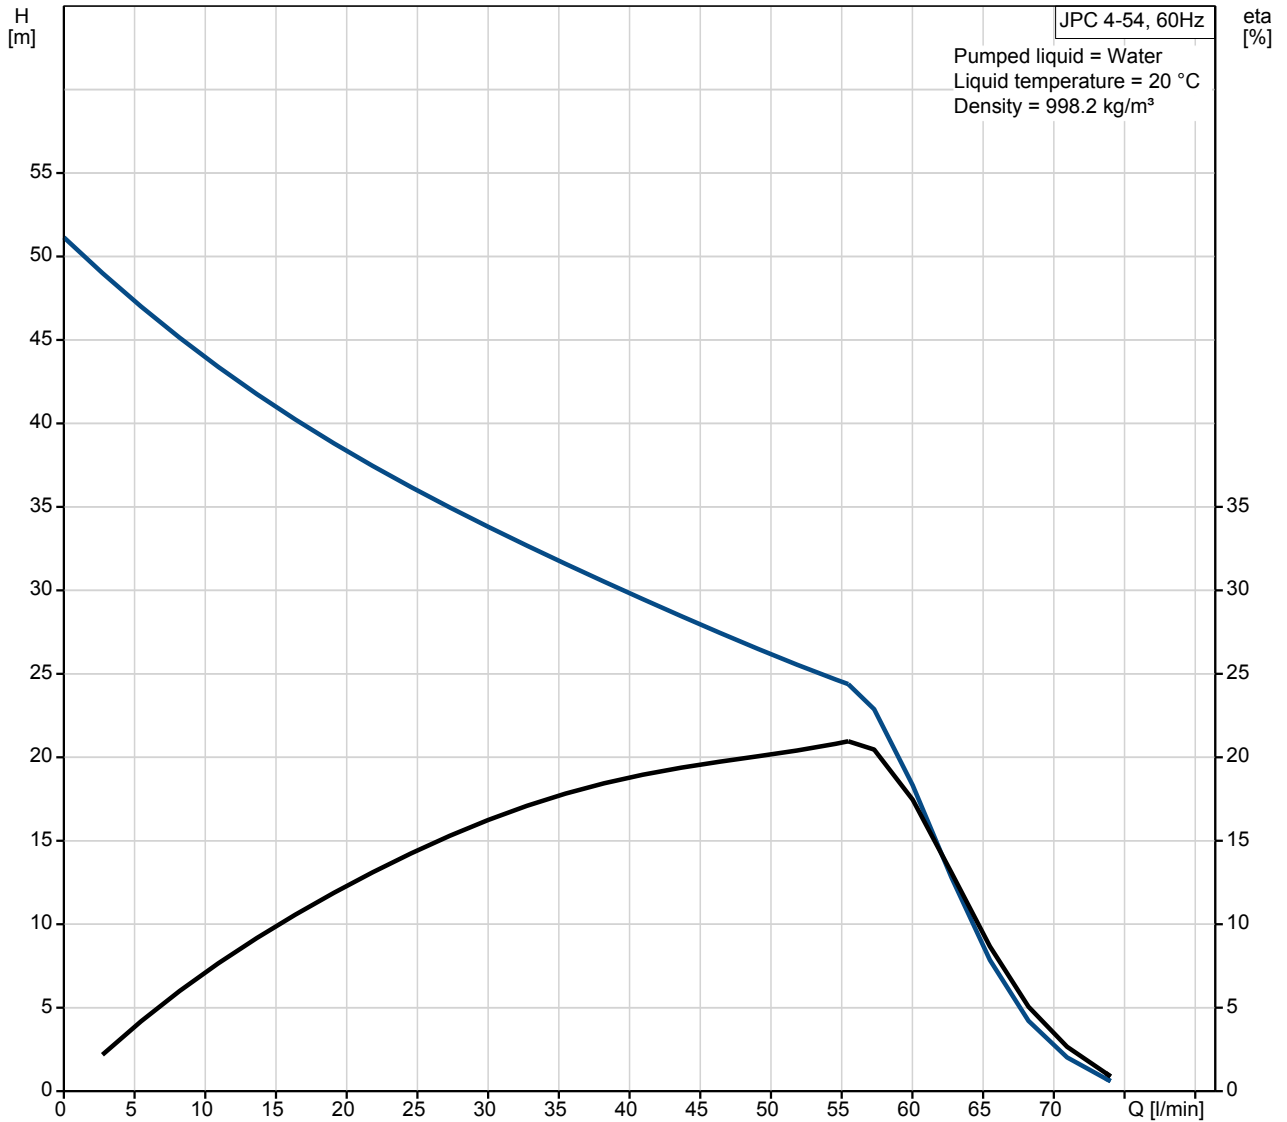

Description	Value
-------------	-------

General information:

Product name: JPC 4-54 A-C-BBVP
 Product No: 99074061
 EAN number: 5712600400900
 Price: On request

Technical:

Head max: 54 m
 Primary shaft seal: BBVP
 Approvals on nameplate: CE
 Curve tolerance: ISO9906:2012 3B
 Pump version: A
 Model: A
 Ejector valve: no

Materials:

Pump housing: COMPOSITE
 Impeller: COMPOSITE
 Material code: C

Installation:

Range of ambient temperature: -10 .. 55 °C
 Maximum operating pressure: 6 bar
 Pump inlet: G1
 Pump outlet: G1

Liquid:

Pumped liquid: Water
 Liquid temperature range: 0 .. 60 °C
 Liquid temp: 20 °C
 Density: 998.2 kg/m³

Electrical data:

Nominal power - P2: 1 HP
 Power input - P1: 1.47 HP
 Mains frequency: 60 Hz
 Rated voltage: 1 x 220-230 V
 Rated current: 5 A
 Capacitor size - run: 12.5 µF/450 V
 Enclosure class (IEC 34-5): IP44
 Insulation class (IEC 85): F
 Type of cable plug: NONE
 Cable: Y

Controls:

Presscontrol: without press control
 Switch: on/off switch not included

Others:

Net weight: 11 kg
 Gross weight: 11 kg
 Shipping volume: 0.026 m³

